Assembly Instructions

Please keep for future reference



Oakstyle Chic 3+2 Unit



Version 1: 21/07/2020

Important - Please read these instructions fully before starting assembly

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Warning: This unit is heavy. Please lift with care.
- Check you have all the components and tools listed.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers for inserting screws, damage the unit.

as this could damage the unit. Only use hand screwdrivers.

- Safety note: This unit must be secured to a wall using the overbalance protector kits supplied.
- Dispose of all packaging carefully and responsibly.


Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Contact Us

Aqua Pacific UK Ltd.
Unit 10, Oriana Way
Nursling Industrial Estate
Southampton
SO16 0YU

Tel +44 (0) 2380 734000 Fax +44 (0) 2380 740200 Sales@aquapacific.co.uk

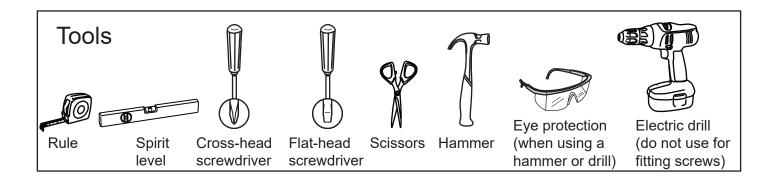


Panels

Please check you have all the panels listed below х3 x 3 х 3 x 3 x 3 **1**) Drawer Front **2**) Left Drawer Side **3**) Right Drawer Side **4**) Drawer Back (DF-00023486) (WRP-00000081) (WRP-00000082) (WRP-00000376) (42.35 x 21.7cm) 35 x 16.5cm 35 x 16.5cm 37.9 x 16.5cm (5) Drawer Base (TDF-00020388) 39 x 34.7cm -Identification hole (7) Right Side (8) Left Divider (9) Right Divider (6) Left Side (DF-00023494) (DF-00023493) (DF-00023497) (DF-00023498) (64.5 x 37.1cm) (64.5 x 37.1cm) (64.5 x 37.1cm) (64.5 x 37.1cm) **(10)** Top (DF-00020378) (11) Base (DF-00020379) (123.15 x 41cm) (123.15 x 37.2cm) x 2 (15) H-Frame Cross Rail (DF-00021047) (13) H-Frame LH Upright (DF-00021046) (112.65 x 12.5cm) (37.1 x 12.5cm) -Identification hole (14) H-Frame RH Upright (DF-00021249) (37.1 x 12.5cm) **12)** Back Panel (DF-00020353) (78.5 x 39.6cm) x 2 (**16**) LH Door (**17**) RH Door (DF-00023484) (DF-00023487) (65.7 x 39.6cm) (65.7 x 39.6cm)

Fittings

Please check you have all the fittings listed below

Bag 1



Large Metal Dowel (F901) x 16



Large Locking Cam Nut (F900) x 16



Wooden Dowel (F22) x 24



Allen Key (F36) x 1



50mm Screw (F49) x 4



40mm Screw (F910) x 8



45mm Screw (F65) x 4



13mm Screw (F63) x 8



9mm Screw (F73) x 12



20mm Screw (F461) x 4



Door Buffers (F137) x 6




Shelf stud (F110) x 6

* These are for fixing the Hood. See separate instructions for fitting details.

Bag 2





Large Metal Dowel (F901) x 6



20mm Screw (F461) x 4



Small Locking Cam Nut (F900) x 6



Knock-in Peg (F171GY) x 12





9mm Screw (F74) x 6



Back Holder (F639) x 12

Individual Bags









Drawer runner (F1004) x 6

Prepare the 3 Drawer Fronts

Screw 2 Metal Dowels into each Drawer Front.

Note: Tighten the Metal Dowels up fully against the panel.

Stick a door buffer into the top corners of each Drawer Front.

Step 2

Prepare the 3 pair of Drawer Sides

Insert a Small Locking Cam Nut into each Left Drawer Side and each Right Drawer Side.

Note: The arrow on the Small Locking Cam Nut must point towards the hole in the edge of the panel.

Step 3


Attach the Drawer Sides to the Drawer Fronts


Push the Drawer Sides onto the back of the Drawer Fronts.


Turn the Small Locking Cam nuts on the Drawer Sides.


Note: Turn the Small Locking Cam nuts clockwise to secure the panels - more than 1/2 a turn.


Use Bag 2 for steps 1 - 7











Fit the Drawer Bases

Slide the Drawer Base down the grooves in the Drawer Sides and down into the groove in the Drawer Front.



Fit the Drawer Backs

Fit the Drawer Back between the Drawer Sides.

Make sure that the Drawer Base fits into the groove in the Drawer Back.

Hold the Drawer Back in position and tap the Knock-in Pegs through the holes in the Drawer Sides.

Step 6


Attach the Handles


Attach a Handle to each Drawer Front using two 20mm Screws from Bag 1.


Step 7


Fit the Wedgefixes

Turn the 3 drawer assembles over and slide 2 Wedgefixes into the front and back grooves, as shown, and tighten up the screws.




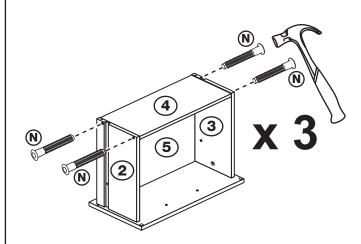





The Drawer assembly must be square before fitting the wedgefixes



Prepare the Left Divider


a: Place a runner on the Left Divider, as shown. Slide back the top of Runner and use the 2nd hole from the front to fit the first 9mm Screw.


b: Slide the Runner back the other way and fit the second 9mm Screw into the corresponding hole in the Left Divider.


C: Tap 2 Wooden Dowels into the Left Divider.

Insert 2 Large Locking Cam Nuts into the Left Divider.

Use Bag 1 for steps 8 - end





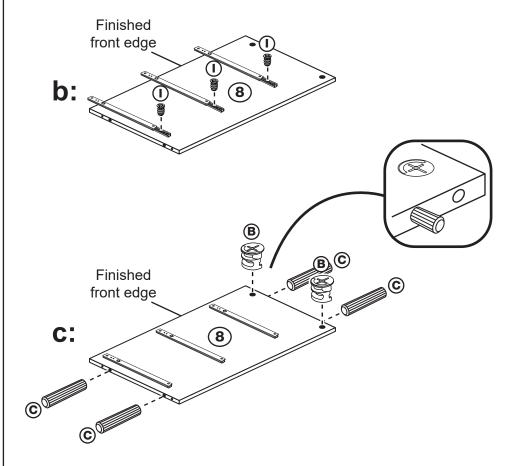


Prepare the Right Divider


a: Place a runner on the Right Divider, as shown. Slide back the top of Runner and use the 2nd hole from the front to fit the first 9mm Screw.


b: Slide the Runner back the other way and fit the second 9mm Screw into the corresponding hole in the Right Divider.


C: Tap 2 Wooden Dowels into the Right Divider.

Insert 2 Large Locking Cam Nuts into the Right Divider.



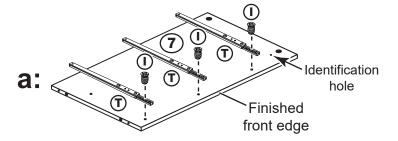




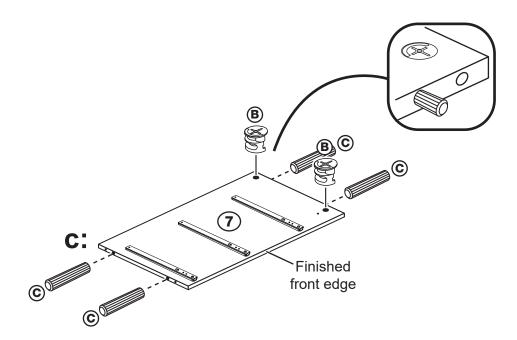

Fit the Left Divider to the Base


Attach the Left Divider to the Base using two 40mm Screws.

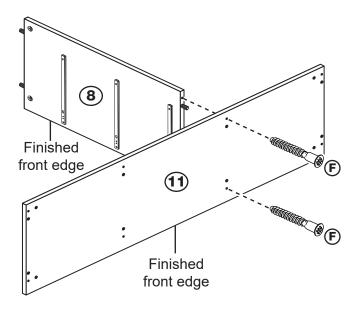

Step 11


Fit the Right Divider

Attach the Right Divider to the Base using two 40mm Screws.

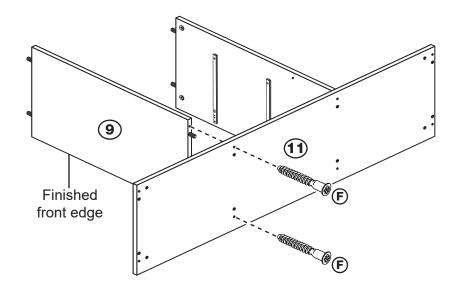

Prepare the 2 H-Frame Uprights

Screw 2 Metal Dowels into the H-Frame LH Upright and the H-Frame RH Upright.

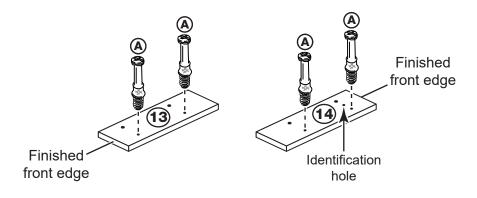


Step 13

Prepare the 2 H-Frame Cross Rails

Tap 2 Wooden Dowels into the H-Frame Cross Rail.

Insert 2 Large Locking Cam Nuts into the H-Frame Cross Rail.

Note: The arrow on the Large Locking Cam Nuts must point towards the hole in the edge of the panel.

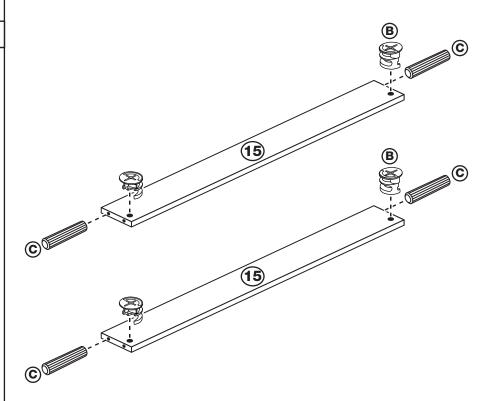


Step 14

Join the 2 H-Frame Cross Rails to the H-Frame LH Upright

Push the 2 H-Frame Cross Rails onto the H-Frame LH Upright.

Use a flat-head screwdriver to tighten the 2 Large Locking Cam Nuts fitted to the 2 H-Frame Cross Rails.

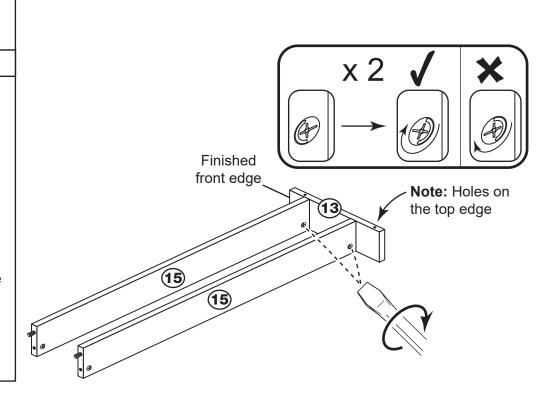

Fit the H-Frame RH Upright


Push the H-Frame RH Upright onto the 2 H-Frame Cross Rails.

Use a flat-head screwdriver to tighten the 2 Large Locking Cam Nuts fitted to the 2 H-Frame Cross Rails.

Step 16

Fit the H-Frame to the Base

Push the H-Frame onto the Base and secure it using four 50mm Screws and the Allen Key, as shown.

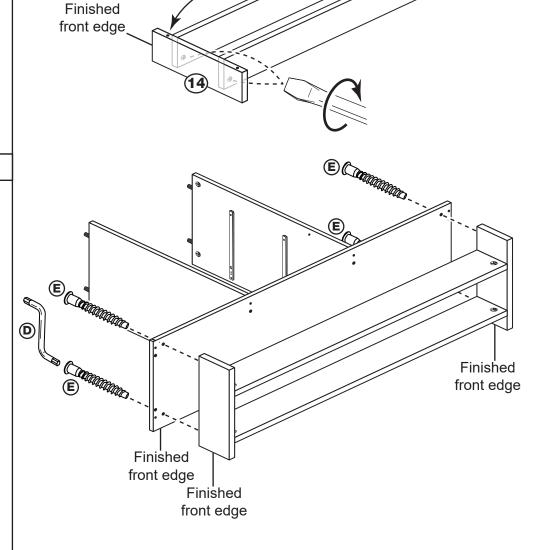

x 2


Note: Holes on

the top edge

Step 17

Raise the assembly

To make it easier to fit the Top Panel, place packaging pieces underneath the Side Panels to raise the assembly.

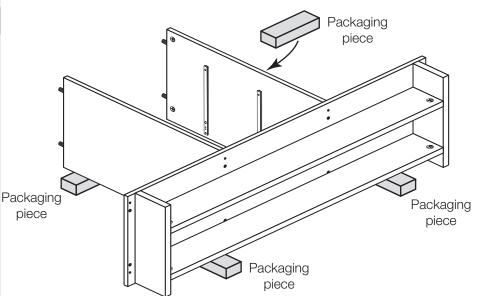

Prepare the Left Side

Tap 4 Wooden Dowels into the Left Side.

Insert 2 Large Locking Cam Nuts into the Left Side.


Finished front edge 6

Step 19

Prepare the Right Side

Tap 4 Wooden Dowels into the Right Side.

Insert 2 Large Locking Cam Nuts into the Left Side.

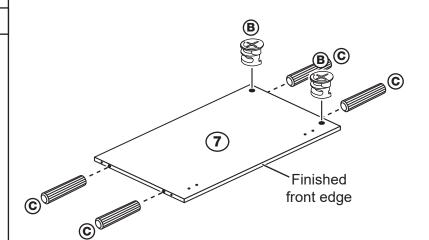


Packaging

Step 20

Fit the Left Side and

Right Side to the Base

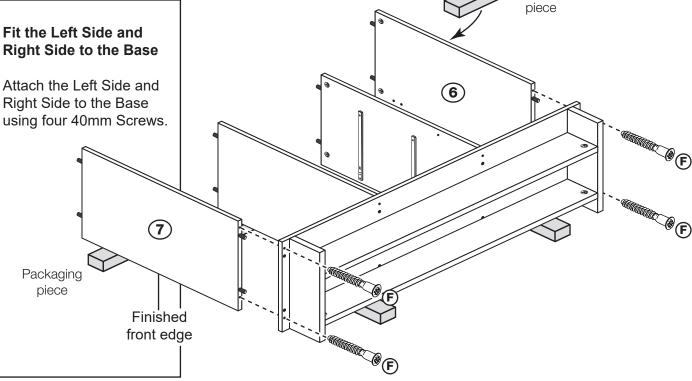


Prepare the Top

Screw 8 Metal Dowels into the Top.

Fit the 2 Brackets from the Overbalance Protector Kit to the shallow mark-holes drilled into the Top using 1 of their Screws.


Note: Only fit 1 of the Screws, the other 1 will be fitted later.

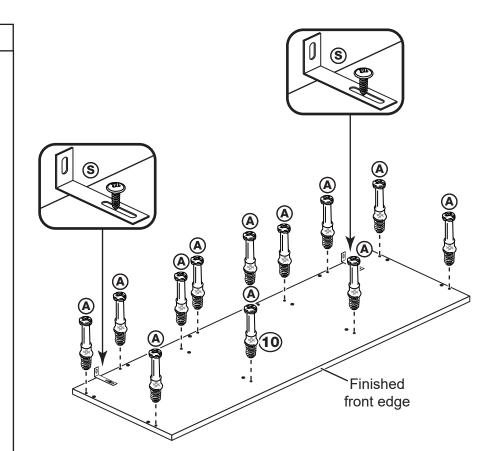

Step 22


Fit the Top

Push the Top Panel onto the 2 Side Panels.

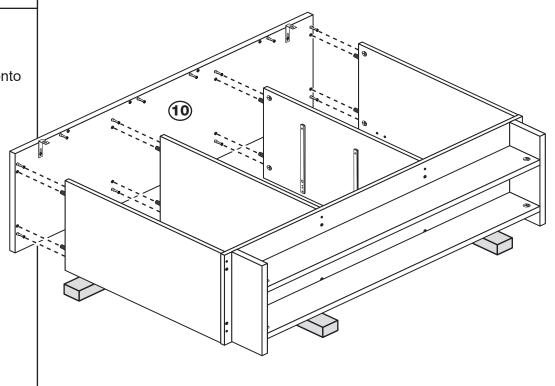

Secure the Top

Use a flat-head screwdriver to tighten the 8 Large Locking Cam Nuts fitted to the Sides.

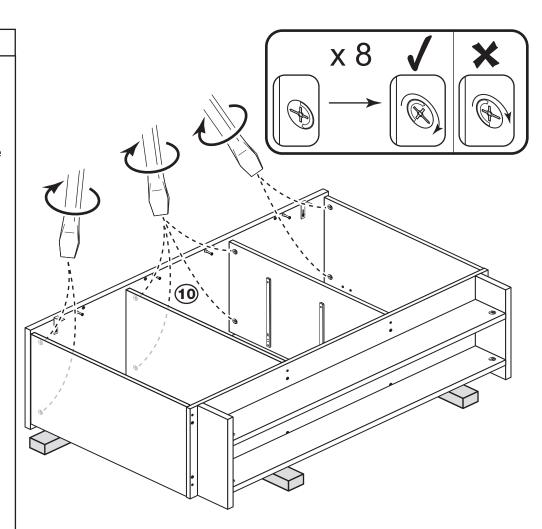


Step 24

Prepare the 2 Backs

Tap 2 Wooden Dowels into each Back.

Insert 2 Large Locking Cam Nuts into each Back.

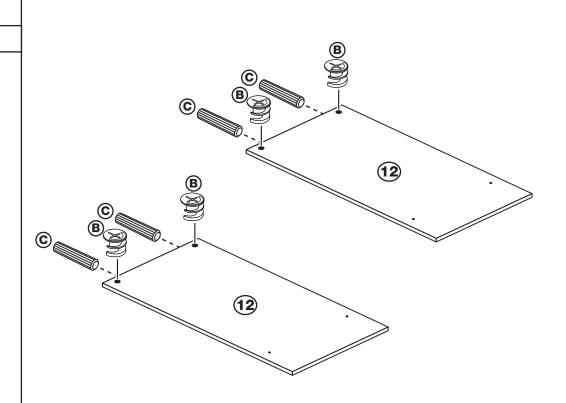


Fit the 2 Backs

Push the 2 Backs onto the Top.

Use a screwdriver to tighten the 2 Large Locking Cam Nuts fitted to each Back.

Fix each Back to the back edge of the Base with two 45mm Screws.

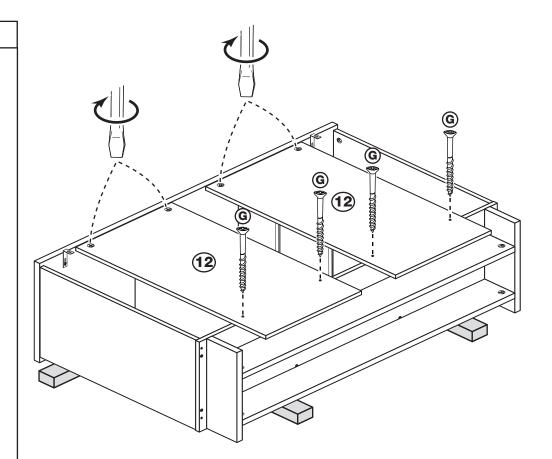

Secure the unit to a wall

a: Before fitting the unit to a wall, use a spirit level to check the top of the unit is level, front-to-back and side-to-side in the 3 positions shown.
Use suitable packing pieces (not supplied) to make the unit level.

To prevent possible overbalancing this unit must be secured to a suitable wall by fitting the Overbalance Protector Kit to a wall.


b: Push the unit up against the wall and slide the Brackets against the wall. Fit the 2nd Screws from the kit into the underside of the Top panel.


Mark the slot at the back of the Brackets for drilling into the wall.

Wall fixings are not supplied as they will need to suit the wall type.

Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

This unit must be fixed to a wall using the Overbalance Protector Kit provided




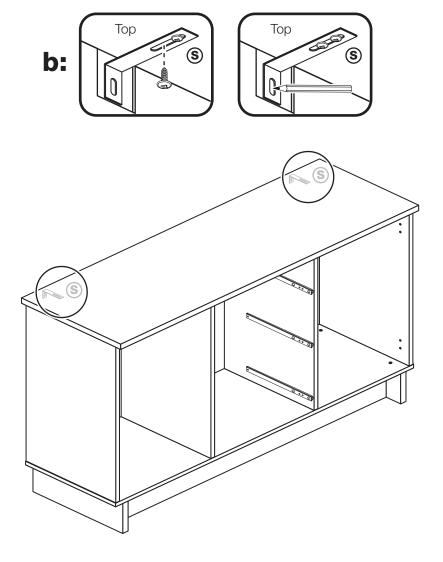

Prepare the 2 Doors

Push fit 2 Hinges into each Door.

Secure each hinge with two 13mm Screws.

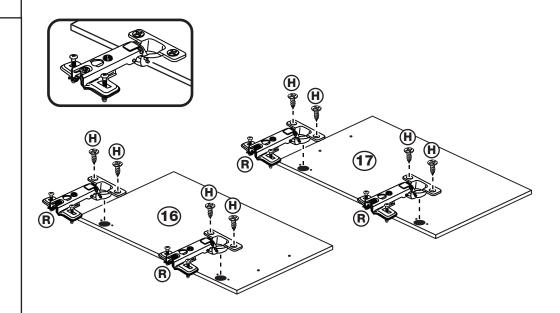


Step 28

Fit the Doors

Line up the 2 screws in the top Hinge with the 2 holes at the top of the Side and push them in.


Now push in the other Hinge.

When the Hinges have been pushed into place, tighten their 2 screws.

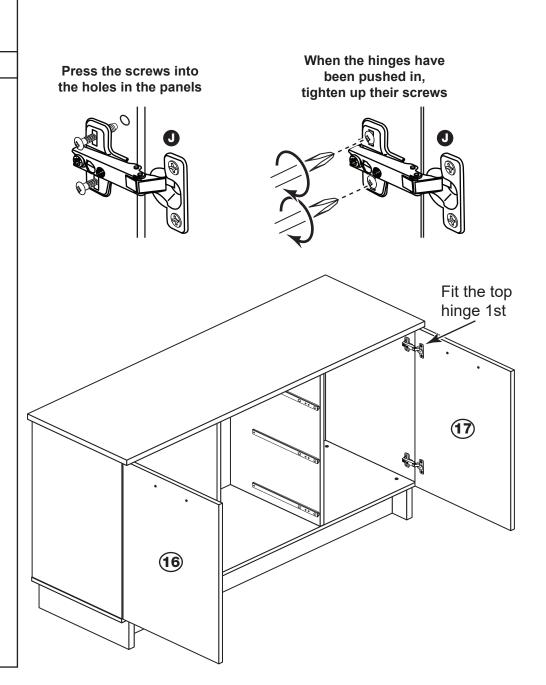

Attach the Handles

Attach a Handle to each of the Doors using two 20mm Screws.

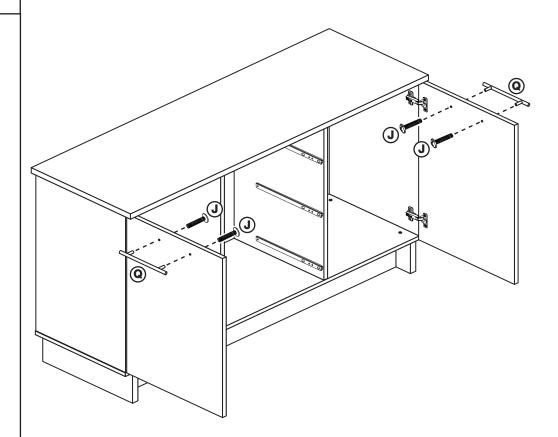


Fit the Drawers

Starting with the bottom Drawer, slide both the Runners forward and locate the Drawer Sides between them, lining up their holes with the 2nd 'threaded' holes in the Runners.

Working from the inside of the Drawer, insert 2 9mm Screws through the Drawer Sides and out into the 2nd threaded hole in the Runner.

Note: Do not overtighten the Screws. If they catch on the Runner you may need to loosen them slightly.

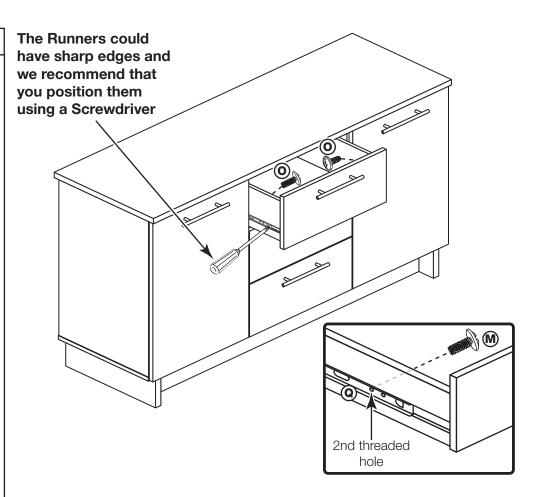


Step 31

Adjust the Doors if needed

a: Height adjustment. Loosen Screws A on Hinge Plates and move Door up or down as required. Retighten Screw A.

b: Forward and Back adjustment.
Loosen Screw B on Hinge Plate and move Door in or out as required.
Retighten Screw B.

C: Sideways adjustment. To move Door 'out' loosen Screw C. To move Door 'in' tighten Screw C.

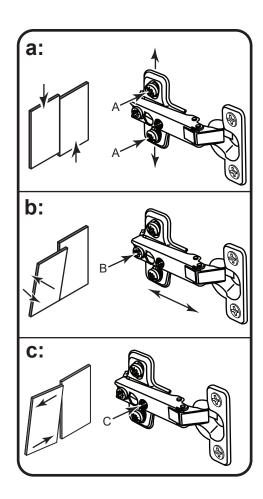

Assembly is complete

